

ZX14 Tiger Tail Inner Fender Installation Instructions


1. Remove Seat and rear cowling plastic
2. Remove Fuel Tank (remove fuel too. Tank will be heavy otherwise)
3. Remove tool kit and tool kit plastic tray.
4. Disconnect all electrical harness mounted to your stock inner fender and key latch for seat.
5. Remove stock bolts connecting plastic inner fender to sub-frame. (see reconnect pictures for locations)
6. Transfer all rubber grommets and rubber collapse nuts to new Tiger Tail Inner Fender as shown.



7. Cut square metal brace off of key latch as shown and mount key latch using supplied spacers. Position back into sub-frame and connect rear of Inner Fender FIRST. See picture. You MUST put aluminum mount plate ON TOP of black hole tabs. NOT underneath. You can loosen the 2 bolts securing the brace to position the aluminum mount plate to help, and then retighten when positioned.



8. Now install the two mount bolts that secure the inner fender to the sub-frame along the cross brace.

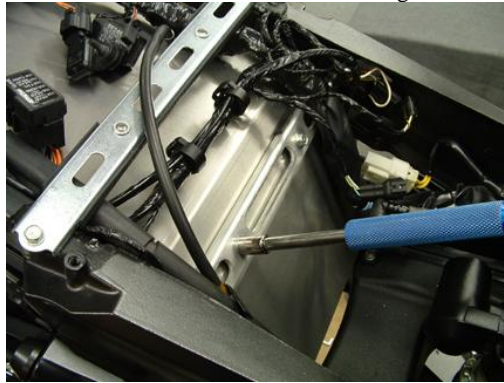

9. Replace your electrical harness and check all connectors. You're done. Re-install Fuel Tank and all plastic cowling covers.

